


TSMA-J04/TSMA-J05 40 mm-220 mm Agitator Seal

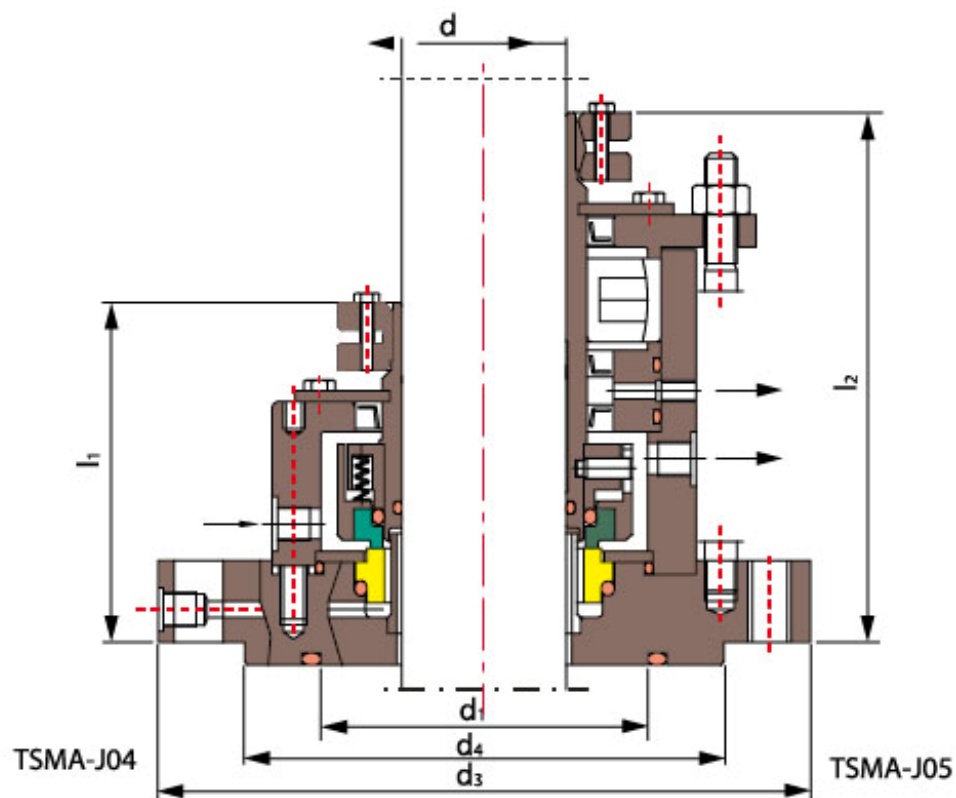

Operating Limits

Pressure: $\leq 0.6\text{MPa}$

Speed: $\leq 1000\text{rpm}$

Shanghai Trisun Parts Manufacture Co.,Ltd.

Head office in Shanghai:

Room 05-06, 16th Floor, Hongjia Building, No.388 Fushan Rd. (Near Xiangcheng Rd.), Pudong, Shanghai, China.

Post Code: 200122

Tel: +86-21-58355541,+86-21-58353145,+86-21-58353343

Fax: +86-21-58353141

E-mail: trisunseal@yahoo.com.cn



Temperature: -60°C~+260°C

Rotary Ring (SiC/Carbon/TC)

Stationary Ring (SiC/Ceramic/TC)

Secondary Seal (VITON/Encapsulated Ring/PTFE)

Other Parts (SUS304/SUS316/Titanium/Hastelloy-C)

d (mm)	d ₁	d ₃	d ₄	l ₁	l ₂
40	91	175	110	115	165
50	107	240	176	115	175
60	120	240	176	125	195
80	149	275	204	140	215
100	174	305	234	140	230
125	199	330	260	160	255
140	218	395	313	170	275
160	237	395	313	170	275
180	263	445	364	190	300
200	288	445	364	190	320
220	326	505	422	200	335

Shanghai Trisun Parts Manufacture Co.,Ltd.

Head office in Shanghai:

Room 05-06, 16th Floor, Hongjia Building, No.388 Fushan Rd. (Near Xiangcheng Rd.), Pudong, Shanghai, China.

Post Code: 200122

Tel: +86-21-58355541,+86-21-58353145,+86-21-58353343

Fax: +86-21-58353141

E-mail: trisunseal@yahoo.com.cn