


TSMA-B03 30mm-230mm Agitator Seal

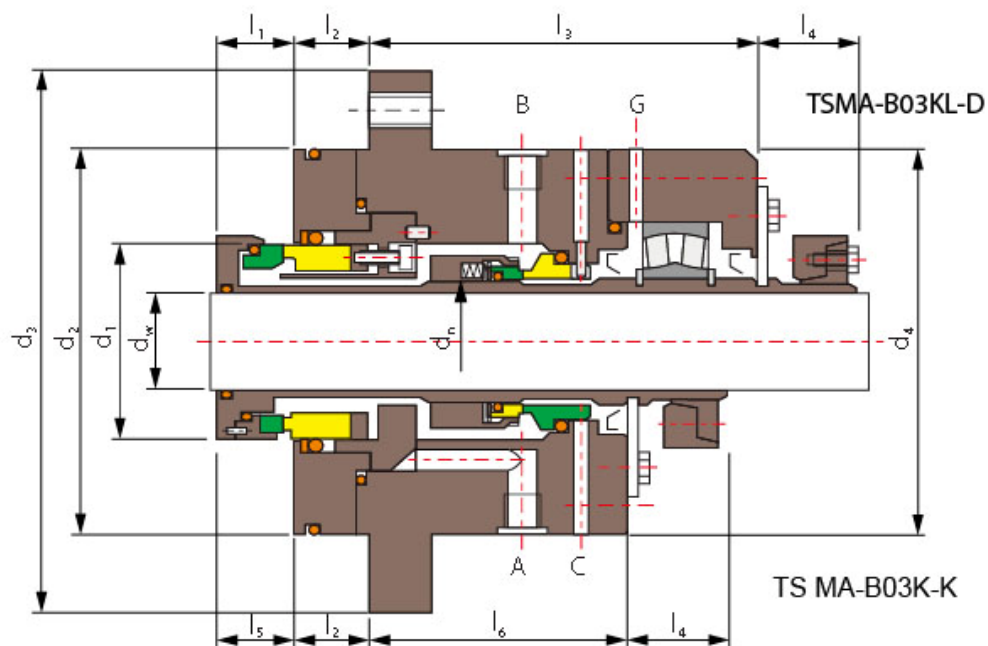

Operating Limits

Pressure: $\leq 1.4\text{MPa}$ or $\leq 2.3\text{MPa}$

Speed: $\leq 10\text{m/s}$ or $\leq 20\text{m/s}$

Temperature: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$ / $-20^{\circ}\text{C} \sim +300^{\circ}\text{C}$

Shanghai Trisun Parts Manufacture Co.,Ltd.

Head office in Shanghai:

Room 05-06, 16th Floor, Hongjia Building, No.388 Fushan Rd. (Near Xiangcheng Rd.), Pudong, Shanghai, China.

Post Code: 200122

Tel: +86-21-58355541,+86-21-58353145,+86-21-58353343

Fax: +86-21-58353141

E-mail: trisunseal@yahoo.com.cn



Rotary Ring (SiC/TC)

Stationary Ring (SiC/Carbon/TC)

Secondary Seal (VITON/Encapsulated Ring/PTFE)

Other Parts (SUS304/SUS316/Titanium/Hastelloy-C)

dn (mm)	dw	d ₁	d ₂	d ₃	d ₄	l ₁	l ₂	l ₃	l ₄	l ₅	l ₆	A , B	C
30	20	52	117	140	118	35	30	114	30	22	75	G3/8	G1/8
35	25	58	124	150	128	35	30	127	30	22	85	G3/8	G1/8
40	30	62	134	165	138	35	30	129	30	24	87	G3/8	G1/8
45	35	68	140	175	148	35	30	130	30	24	87	G3/8	G1/8
50	40	75	145	175	148	35	30	133	34	26	90	G3/8	G1/8
55	45	82.7	150	175	148	35	30	135	34	26	90	G3/8	G1/8
60	50	85	160	185	158	41	30	150	34	30	105	G3/8	G1/8
65	50	90	170	195	168	41	30	160	34	30	105	G3/8	G1/8
70	55	95	175	205	178	41	30	160	34	30	105	G3/8	G1/8
75	60	100	180	205	178	41	30	160	34	30	105	G3/8	G1/8
80	65	110	190	220	188	41	40	190	44	30	105	G3/8	G1/8
85	70	115	195	230	198	41	40	190	44	30	105	G3/8	G1/8
90	75	120	200	230	198	41	40	190	44	30	105	G3/8	G1/8
95	80	127	205	235	203	41	40	190	44	30	105	G3/8	G1/8
100	80	130	210	240	208	41	40	190	44	30	105	G3/8	G1/8
105	85	135	215	250	218	41	40	190	44	30	105	G1/2	G1/4
110	90	140	230	260	228	41	40	190	44	31	110	G1/2	G1/4
115	95	145	235	270	238	41	40	190	44	31	110	G1/2	G1/4
120	100	150	240	270	238	42	40	200	50	31	120	G1/2	G1/4
130	110	160	255	290	258	42	40	200	50	31	120	G1/2	G1/4
140	120	172	265	305	268	43	50	220	50	41	130	G1/2	G1/4
150	130	185	275	315	278	43	50	220	50	41	130	G1/2	G1/4
160	140	195	290	335	298	43	50	220	50	41	130	G1/2	G1/4
170	150	205	300	335	323	47	50	220	50	45	130	G1/2	G1/4
180	160	220	330	355	358	47	50	250	50	45	140	G1/2	G1/4
190	170	230	345	375	358	47	50	250	55	45	140	G1/2	G1/4
200	180	240	365	395	378	47	50	250	55	45	140	G1/2	G1/4
210	190	260	385	415	378	50	50	250	55	45	140	G1/2	G1/4
220	190	270	395	425	388	50	50	250	55	45	140	G1/2	G1/4
230	200	280	395	425	388	50	50	300	55	45	160	G1/2	G1/4

Shanghai Trisun Parts Manufacture Co.,Ltd.

Head office in Shanghai:

Room 05-06, 16th Floor, Hongjia Building, No.388 Fushan Rd. (Near Xiangcheng Rd.), Pudong, Shanghai, China.

Post Code: 200122

Tel: +86-21-58355541,+86-21-58353145,+86-21-58353343

Fax: +86-21-58353141

E-mail: trisunseal@yahoo.com.cn



Shanghai Trisun Parts Manufacture Co.,Ltd.

Head office in Shanghai:

Room 05-06, 16th Floor, Hongjia Building, No.388 Fushan Rd. (Near Xiangcheng Rd.), Pudong, Shanghai, China.

Post Code: 200122

Tel: +86-21-58355541,+86-21-58353145,+86-21-58353343

Fax: +86-21-58353141

E-mail: trisunseal@yahoo.com.cn