


TSMA-B04 40mm-220mm Agitator Seal

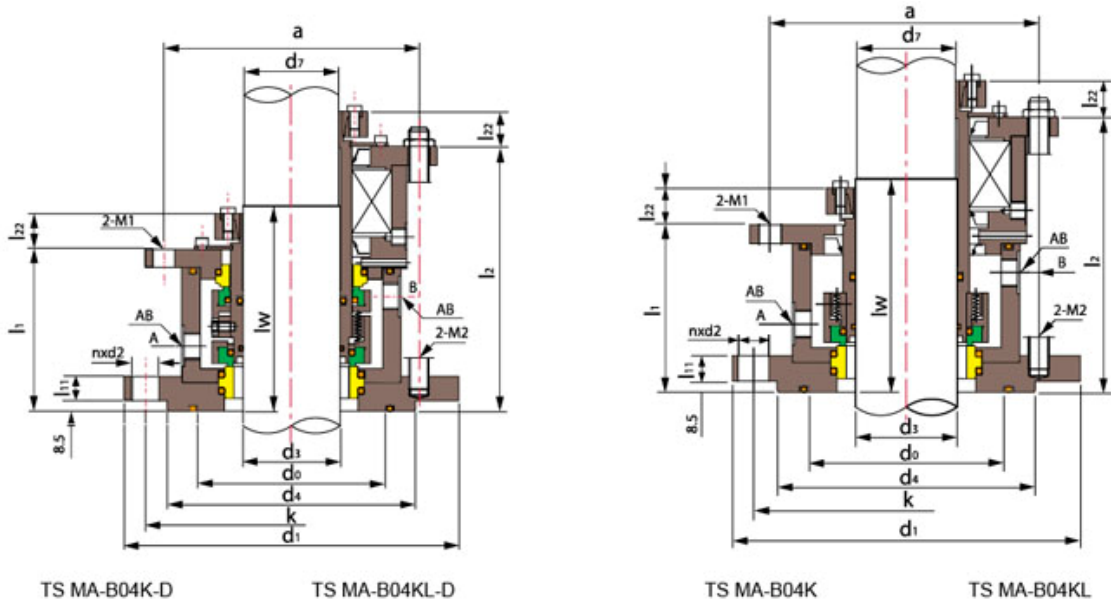

Operating Limits

Pressure: $\leq 0.6\text{MPa}$ or $\leq 1.6\text{MPa}$

Speed: $\leq 2\text{m/s}$ or $\leq 5\text{m/s}$

Temperature: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C} / -80^{\circ}\text{C} \sim +250^{\circ}\text{C}$

Rotary Ring (SiC/Carbon/TC)

Stationary Ring (SiC/TC/Ceramic)

Secondary Seal (VITON/Encapsulated Ring/PTFE)

Shanghai Trisun Parts Manufacture Co.,Ltd.

Head office in Shanghai:

Room 05-06, 16th Floor, Hongjia Building, No.388 Fushan Rd. (Near Xiangcheng Rd.), Pudong, Shanghai, China.

Post Code: 200122

Tel: +86-21-58355541,+86-21-58353145,+86-21-58353343

Fax: +86-21-58353141

E-mail: trisunseal@yahoo.com.cn



Other Parts (SUS304/SUS316/Titanium/Hastelloy-C)

d ₃ ¹ (mm)	d7 ¹	d1	n×d ₂	d ₄	d ₀	k	l ₁	l ₂	lw ²	l ₁ ₁	l ₂ ₂	a	M ₁	M ₂	A, B
40	38	17 5	4× 18	11 0	90	14 5	110 .5	159 .5	14 3	1 5	2 8	12 2	M1 2	M1 6	G3/ 8
50	48	24 0	8× 18	17 6	13 5	21 0	114 .5	174 .5	14 8	1 7	2 8	15 7	M1 2	M1 6	G3/ 8
60	58	24 0	8× 18	17 6	13 5	21 0	119 .0	181 .5	15 8	1 7	2 8	16 8	M1 2	M1 6	G3/ 8
80	78	27 5	8× 22	20 4	15 5	24 0	133 .0	217 .5	16 8	2 0	3 4	20 3	M1 6	M2 0	G1/ 2
100	98	30 5	8× 22	23 4	19 0	27 0	137 .5	218 .5	17 8	2 0	3 4	22 8	M1 6	M2 0	G1/ 2
125	120	33 0	8× 22	26 0	21 5	29 5	138 .5	233 .5	20 3	2 0	4 0	26 8	M2 0	M2 0	G1/ 2
140	135	39 5	12× 22	31 3	25 0	35 0	152 .5	250 .5	20 8	2 0	4 0	28 5	M2 0	M2 0	G1/ 2
160	150	39 5	12× 22	31 3	26 5	35 0	161 .0	253 .0	21 3	2 5	4 0	29 7	M2 0	M2 0	G1/ 2
180	170	44 5	12× 22	36 4	31 0	40 0	166 .0	263 .5	23 3	2 5	4 5	33 2	M2 4	M2 0	G1/ 2
200	190	44 5	12× 22	36 4	31 0	40 0	171 .0	271 .0	24 3	2 5	4 5	35 2	M2 4	M2 0	G1/ 2
220	210	50 5	16× 22	42 2	34 0	46 0	\	\	26 3	2 5	\	\	M2 4	M2 0	G1/ 2

Shanghai Trisun Parts Manufacture Co.,Ltd.

Head office in Shanghai:

Room 05-06, 16th Floor, Hongjia Building, No.388 Fushan Rd. (Near Xiangcheng Rd.), Pudong, Shanghai, China.

Post Code: 200122

Tel: +86-21-58355541,+86-21-58353145,+86-21-58353343

Fax: +86-21-58353141

E-mail: trisunseal@yahoo.com.cn