


## TSSC-A06 24mm-120mm

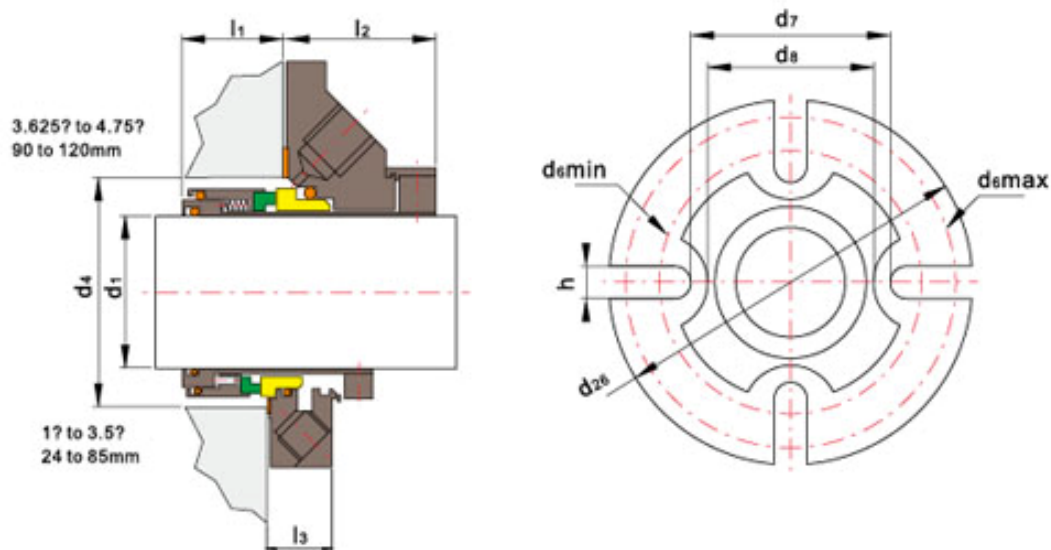

### Features:

#### Operating Limits:

Pressure:  $\leq 2.3\text{MPa}$

Speed:  $\leq 23\text{m/s}$

Temperature:  $-30^\circ\text{C} \sim 200^\circ\text{C}$

1. Rotary Ring (Carbon/SiC/TC)
2. Stationary Ring (SiC/TC)
3. Secondary Seal (VITON/EPDM/Kalrez)

---

**Shanghai Trisun Parts Manufacture Co.,Ltd.**

**Head office in Shanghai:**

Room 05-06, 16th Floor, Hongjia Building, No.388 Fushan Rd. (Near Xiangcheng Rd.), Pudong, Shanghai, China.

**Post Code:** 200122

**Tel:** +86-21-58355541,+86-21-58353145,+86-21-58353343

**Fax:** +86-21-58353141

**E-mail:** [trisunseal@yahoo.com.cn](mailto:trisunseal@yahoo.com.cn)

4.Other Parts (C-276/Duplex/316)

| d <sub>1</sub><br>(inches) | d <sub>4</sub> |       | d <sub>5</sub> |       | d <sub>7</sub> | d <sub>8</sub> | d <sub>26</sub> | l <sub>1</sub> | l <sub>2</sub> | l <sub>3</sub> | h  |
|----------------------------|----------------|-------|----------------|-------|----------------|----------------|-----------------|----------------|----------------|----------------|----|
|                            | min            | max   | min            | max   |                |                |                 |                |                |                |    |
| 24                         | 40.0           | 46.0  | 74.6           | 92.0  | 60.3           | -              | 104.8           | 30.7           | 37.3           | 23.5           | 12 |
| 25                         | 41.0           | 49.2  | 74.6           | 92.0  | 60.3           | -              | 104.8           | 30.7           | 37.3           | 23.5           | 12 |
| 28                         | 44.0           | 52.4  | 74.6           | 95.3  | 60.3           | -              | 108.0           | 30.7           | 37.3           | 23.5           | 12 |
| 30                         | 46.0           | 55.6  | 77.8           | 98.4  | 63.5           | -              | 110.0           | 30.7           | 37.3           | 23.5           | 12 |
| 32                         | 48.0           | 55.6  | 77.8           | 98.4  | 63.5           | -              | 110.0           | 30.7           | 37.3           | 23.5           | 12 |
| 33                         | 49.0           | 55.6  | 77.8           | 98.4  | 63.5           | -              | 110.0           | 30.7           | 37.3           | 23.5           | 12 |
| 35                         | 50.8           | 58.7  | 80.9           | 98.4  | 66.7           | -              | 110.0           | 30.7           | 37.3           | 23.5           | 12 |
| 38                         | 57.2           | 63.5  | 85.7           | 114.3 | 71.9           | -              | 127.0           | 27.7           | 35.6           | 21.6           | 12 |
| 40                         | 57.2           | 63.5  | 85.7           | 114.3 | 71.9           | -              | 127.0           | 27.7           | 35.6           | 21.6           | 12 |
| 43                         | 60.3           | 63.5  | 85.7           | 114.3 | 71.9           | -              | 127.0           | 27.7           | 35.6           | 21.6           | 12 |
| 45                         | 63.5           | 69.8  | 90.5           | 120.7 | 76.7           | -              | 133.4           | 27.7           | 35.6           | 21.6           | 12 |
| 48                         | 66.7           | 69.8  | 90.5           | 120.7 | 76.7           | -              | 133.4           | 27.7           | 35.6           | 21.6           | 12 |
| 50                         | 68.0           | 69.8  | 90.5           | 120.7 | 76.7           | -              | 133.4           | 27.7           | 35.6           | 21.6           | 12 |
| 53                         | 71.0           | 76.2  | 100            | 127.0 | 86.0           | -              | 139.7           | 29.2           | 35.9           | 21.6           | 12 |
| 55                         | 73.0           | 84.1  | 111.1          | 130.2 | 93.7           | -              | 146.0           | 29.2           | 35.9           | 21.6           | 16 |
| 58                         | 76.2           | 84.1  | 111.1          | 130.2 | 93.7           | -              | 146.0           | 29.2           | 35.9           | 21.6           | 16 |
| 60                         | 79.4           | 90.5  | 117.5          | 136.5 | 100.0          | -              | 152.4           | 29.2           | 35.9           | 21.6           | 16 |
| 63                         | 85.7           | 98.4  | 127            | 161.9 | 109.5          | -              | 177.8           | 31.8           | 38.1           | 23.5           | 16 |
| 65                         | 88.9           | 98.4  | 127            | 161.9 | 109.5          | -              | 177.8           | 31.8           | 38.1           | 23.5           | 16 |
| 70                         | 92.1           | 98.4  | 127            | 161.9 | 109.5          | -              | 177.8           | 31.8           | 38.1           | 23.5           | 16 |
| 75                         | 98.5           | 114.3 | 142.9          | 173.0 | 125.4          | -              | 190.5           | 31.8           | 38.1           | 23.5           | 16 |

**Shanghai Trisun Parts Manufacture Co.,Ltd.**

**Head office in Shanghai:**

Room 05-06, 16th Floor, Hongjia Building, No.388 Fushan Rd. (Near Xiangcheng Rd.), Pudong, Shanghai, China.

**Post Code:** 200122

**Tel:** +86-21-58355541,+86-21-58353145,+86-21-58353343

**Fax:** +86-21-58353141

**E-mail:** [trisunseal@yahoo.com.cn](mailto:trisunseal@yahoo.com.cn)

|     |       |       |       |       |       |       |       |      |      |      |    |
|-----|-------|-------|-------|-------|-------|-------|-------|------|------|------|----|
| 80  | 101.6 | 114.3 | 142.9 | 173.0 | 125.4 | -     | 190.5 | 31.8 | 38.1 | 23.5 | 16 |
| 85  | 108.0 | 123.7 | 152.4 | 185.7 | 135.0 | -     | 203.2 | 31.8 | 38.1 | 23.5 | 16 |
| 90  | 114.3 | 127.0 | 171.5 | 195.2 | 150.8 | 127.0 | 215.9 | 31.8 | 47.7 | 19.6 | 20 |
| 95  | 117.5 | 130.2 | 171.5 | 195.2 | 150.5 | 127.0 | 215.9 | 31.8 | 47.7 | 19.6 | 20 |
| 100 | 123.9 | 139.7 | 188.9 | 207.9 | 168.3 | 136.5 | 228.6 | 31.8 | 47.7 | 19.6 | 20 |
| 105 | 130.1 | 149.2 | 189   | 208.0 | 168.3 | 136.5 | 228.6 | 31.8 | 47.7 | 19.6 | 20 |
| 110 | 136.5 | 158.8 | 198.4 | 220.6 | 177.8 | 146.1 | 241.3 | 31.8 | 47.7 | 19.6 | 20 |
| 115 | 142.9 | 168.3 | 211.1 | 230.2 | 186.6 | 155.6 | 254.0 | 31.8 | 47.7 | 19.6 | 22 |
| 120 | 142.9 | 168.3 | 211.1 | 230.2 | 186.6 | 155.6 | 254.0 | 31.8 | 47.7 | 19.6 | 22 |

---

**Shanghai Trisun Parts Manufacture Co.,Ltd.**

**Head office in Shanghai:**

Room 05-06, 16th Floor, Hongjia Building, No.388 Fushan Rd. (Near Xiangcheng Rd.), Pudong, Shanghai, China.

**Post Code:** 200122

**Tel:** +86-21-58355541,+86-21-58353145,+86-21-58353343

**Fax:** +86-21-58353141

**E-mail:** [trisunseal@yahoo.com.cn](mailto:trisunseal@yahoo.com.cn)