


TS MG13 20mm-45mm Component Seal

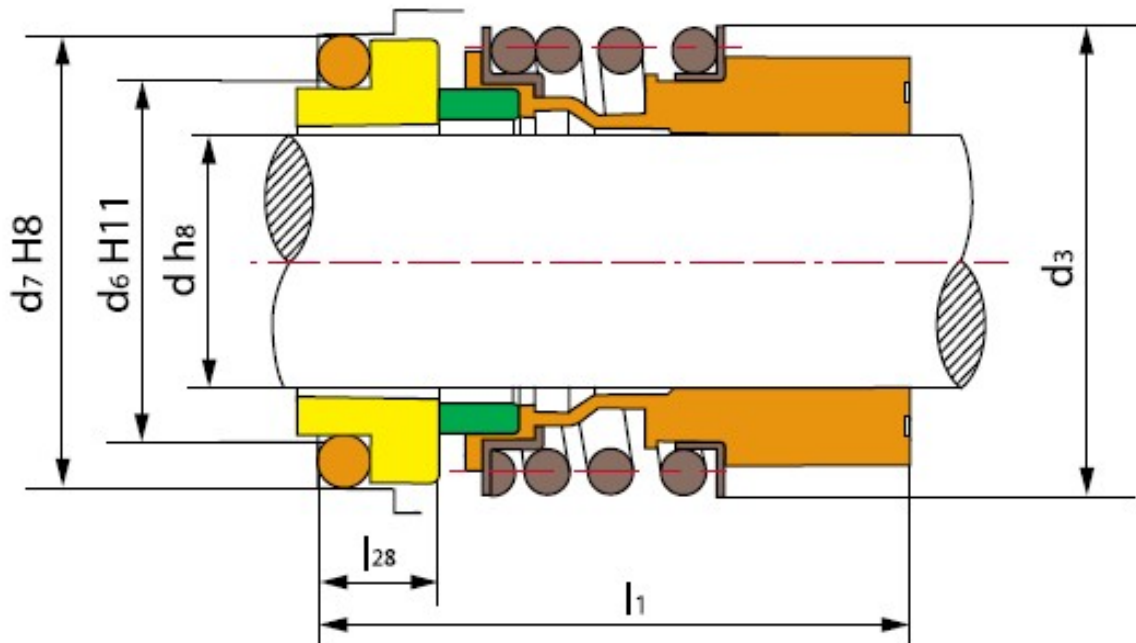

Rotary Ring (Carbon/SiC)
Stationary Ring (Ceramic/SiC/TC)
Secondary Seal (NBR/EPDM/VITON)
Retainer (SUS304/SUS316)
Spring (SUS304/SUS316)

Shanghai Trisun Parts Manufacture Co.,Ltd.

Head office in Shanghai:

Room 05-06, 16th Floor, Hongjia Building, No.388 Fushan Rd. (Near Xiangcheng Rd.), Pudong, Shanghai, China.

Post Code: 200122

Tel: +86-21-58355541,+86-21-58353145,+86-21-58353343

Fax: +86-21-58353141

E-mail: trisunseal@yahoo.com.cn



Spring Holder (SUS304/SUS316)

Operating Limits:

Pressure: $\leq 1.2\text{MPa}$

Speed: $\leq 10\text{m/s}$

Temperature: $-20^{\circ}\text{C}\sim+180^{\circ}\text{C}$

Parameter:

Seal size d(mm)	d ₃	d ₆	d ₇	l ₁	l ₂₈
20	37	29	35	45	7.5
22	37	31	37	45	7.5
24	42.5	33	39	50	7.5
25	42.5	34	40	50	7.5
28	49	37	43	50	7.5
30	49	39	45	50	7.5
32	53.5	42	48	55	7.5
35	57	44	50	55	7.5
38	59	49	56	55	9
40	62	51	58	55	9
42	65.5	54	61	60	9
43	65.5	54	61	60	9
45	68	56	63	60	9

Shanghai Trisun Parts Manufacture Co.,Ltd.

Head office in Shanghai:

Room 05-06, 16th Floor, Hongjia Building, No.388 Fushan Rd. (Near Xiangcheng Rd.), Pudong, Shanghai, China.

Post Code: 200122

Tel: +86-21-58355541,+86-21-58353145,+86-21-58353343

Fax: +86-21-58353141

E-mail: trisunseal@yahoo.com.cn