


TS HJ 18mm-100mm Component Seal

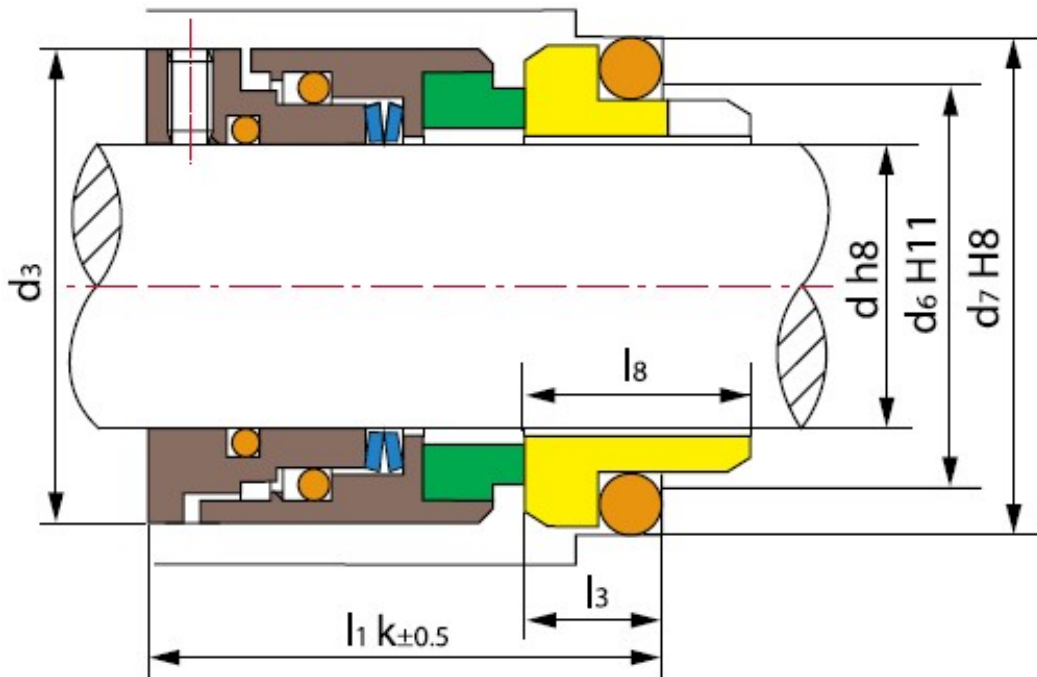

Medium: Liquid rich in solid impurity or high viscosity, such as refine sugar, sewage and

Shanghai Trisun Parts Manufacture Co.,Ltd.

Head office in Shanghai:

Room 05-06, 16th Floor, Hongjia Building, No.388 Fushan Rd. (Near Xiangcheng Rd.), Pudong, Shanghai, China.

Post Code: 200122

Tel: +86-21-58355541,+86-21-58353145,+86-21-58353343

Fax: +86-21-58353141

E-mail: trisunseal@yahoo.com.cn



paper industry.

Design Features:

- a. Single face, balanced.
- b. Conform to the DIN24960 and GB6556 standards.

Rotary Ring (SiC/TC/Carbon)

Stationary Ring (SiC/TC)

Secondary Seal (VITON/Encapsulated Ring)

Metal Parts (SUS304/SUS316)

Wave Spring (17-7PH/SUS304/SUS316)

Operating Limits:

Pressure: ≤ 2.5 MPa

Speed: ≤ 20 m/s

Temperature: $-20 \sim +180^{\circ}\text{C}$

Parameter:

Seal size d(mm)	d ₃	d ₆	d ₇	l ₈	l _{1k}	l ₃
18	32	27	33	15	37.5	7
20	34	29	35	15	37.5	7
22	36	31	37	15	37.5	7
24	38	33	39	15	40.0	7
25	39	34	40	15	40.0	7
28	42	37	43	15	42.5	7
30	44	39	45	15	42.5	7
32	47	42	48	15	42.5	7
33	47	42	48	15	42.5	7
35	49	44	50	15	42.5	7
38	54	49	56	16	45.0	8
40	56	51	58	16	45.0	8
43	59	54	61	16	45.0	8
45	61	56	63	16	45.0	8
48	64	59	66	16	45.0	8

Shanghai Trisun Parts Manufacture Co.,Ltd.

Head office in Shanghai:

Room 05-06, 16th Floor, Hongjia Building, No.388 Fushan Rd. (Near Xiangcheng Rd.), Pudong, Shanghai, China.

Post Code: 200122

Tel: +86-21-58355541,+86-21-58353145,+86-21-58353343

Fax: +86-21-58353141

E-mail: trisunseal@yahoo.com.cn