
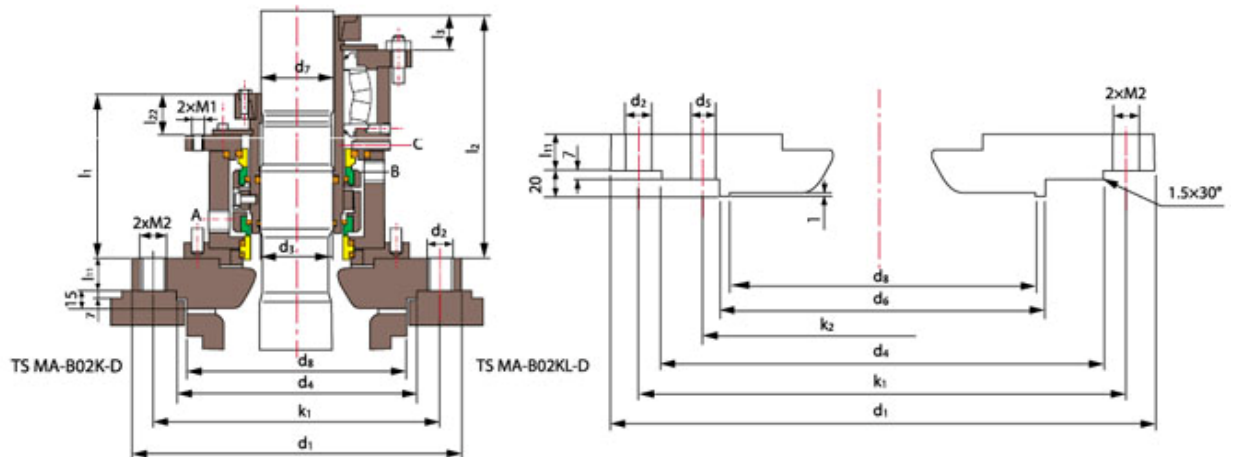


**TSMA-B02 40mm-160mm Agitator Seal**

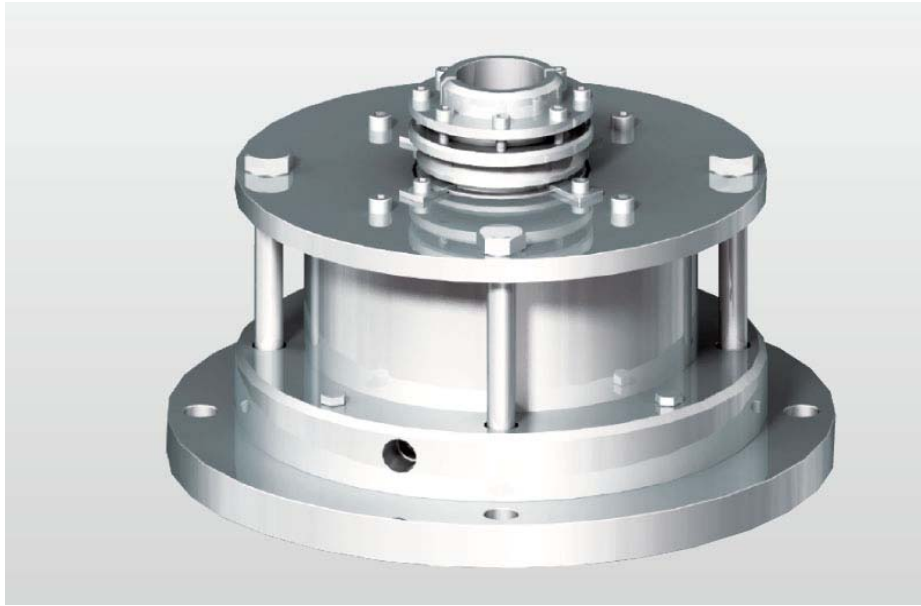

**Operating Limits**

Pressure:  $\leq 0.6\text{MPa}$  or  $\leq 1.6\text{MPa}$

Speed:  $\leq 2\text{m/s}$  or  $\leq 5\text{m/s}$

Temperature:  $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$  /  $-80^{\circ}\text{C} \sim +250^{\circ}\text{C}$

Rotary Ring (SiC/Carbon/TC)

Stationary Ring (SiC/TC/Ceramic)

Secondary Seal (VITON/Encapsulated Ring/PTFE)

Other Parts (SUS304/SUS316/Titanium/Hastelloy-C)

---

**Shanghai Trisun Parts Manufacture Co.,Ltd.**

**Head office in Shanghai:**

Room 05-06, 16th Floor, Hongjia Building, No.388 Fushan Rd. (Near Xiangcheng Rd.), Pudong, Shanghai, China.

**Post Code:** 200122

**Tel:** +86-21-58355541,+86-21-58353145,+86-21-58353343

**Fax:** +86-21-58353141

**E-mail:** [trisunseal@yahoo.com.cn](mailto:trisunseal@yahoo.com.cn)

d <sub>3</sub> (m m)	d <sub>7</sub>	d <sub>1</sub>	Nxd <sub>2</sub>	d <sub>4</sub>	Nxd <sub>5</sub>	d <sub>6</sub>	d <sub>8</sub>	k <sub>1</sub>	k <sub>2</sub>	l <sub>1</sub>	l <sub>2</sub>	l <sub>11</sub>	l <sub>22</sub>	l <sub>3</sub>	M <sub>1</sub>	M <sub>2</sub>	A , B
40	3 8	1 7 5	4× 18	1 1 0	\	\	1 0 2	1 4 5	\	1 4 2	1 8 4	2 5	3 5	2 8	M 1 2	M 1 6	G3 /8
50	4 8	2 4 0	8× 18	1 7 6	\	\	1 3 8	2 1 0	\	1 4 7	1 9 5	2 5	4 0	2 8	M 1 2	M 1 6	G3 /8
60	5 8	2 7 5	8× 22	2 0 4	\	\	1 8 8	2 4 0	\	1 5 8	2 0 3	2 5	4 2	2 8	M 1 2	M 2 0	G3 /8
80	7 8	3 0 5	8× 22	2 3 4	\	\	2 1 2	2 7 0	\	1 7 0	2 4 0	3 0	4 5	3 4	M 1 6	M 2 0	G1 /2
10 0	9 8	3 9 5	12 × 22	3 1 3	\	\	2 6 8	3 5 0	\	1 7 7	2 4 0	3 0	5 2	3 4	M 1 6	M 2 0	G1 /2
10 0	9 8	3 9 5	12 × 22	3 1 3	\	\	2 6 8	3 5 0	\	1 7 7	2 4 0	3 0	5 2	3 4	M 1 6	M 2 0	G1 /2
12 5	1 2 0	5 0 5	4× 22	4 2 2	12 × 22	3 2 0	3 0 6	4 6 0	3 5 0	2 0 8	2 6 6	3 0	7 5	4 0	M 2 0	M 2 0	G1 /2
14 0	1 3 5	5 0 5	4× 22	4 2 2	12 × 22	3 2 0	3 0 6	4 6 0	3 5 0	2 2 3	2 8 2	3 0	7 9	4 0	M 2 0	M 2 0	G1 /2
16 0	1 5 0	5 0 5	4× 22	4 2 2	12 × 22	3 2 0	3 0 6	4 6 0	3 5 0	2 2 8	2 8 2	3 0	7 7	4 0	M 2 0	M 2 0	G1 /2
16 0	1 5 0	5 0 5	4× 22	4 2 2	12 × 22	3 2 0	3 0 6	4 6 0	3 5 0	2 2 8	2 8 2	3 0	7 7	4 0	M 2 0	M 2 0	G1 /2
16 0	1 5 0	5 0 5	2× 26	4 7 4	12 × 22	3 7 0	3 5 6	5 1 5	4 0 0	2 2 8	2 8 2	3 0	7 7	4 0	M 2 0	M 2 0	G1 /2

**Shanghai Trisun Parts Manufacture Co.,Ltd.**

**Head office in Shanghai:**

Room 05-06, 16th Floor, Hongjia Building, No.388 Fushan Rd. (Near Xiangcheng Rd.), Pudong, Shanghai, China.

**Post Code:** 200122

**Tel:** +86-21-58355541,+86-21-58353145,+86-21-58353343

**Fax:** +86-21-58353141

**E-mail:** [trisunseal@yahoo.com.cn](mailto:trisunseal@yahoo.com.cn)